

Score-P – A Joint Performance Measurement Run-Time Infrastructure for Periscope, Scalasca, TAU, and Vampir

VI-HPS Team



Congratulations!?

- If you made it this far, you successfully used Score-P to
 - instrument the application
 - analyze its execution with a summary measurement, and
 - examine it with one the interactive analysis report explorer GUIs
- ... revealing the call-path profile annotated with
 - the “Time” metric
 - Visit counts
 - MPI message statistics (bytes sent/received)
- ... but how **good** was the measurement?
 - The measured execution produced the desired valid result
 - however, the execution took rather longer than expected!
 - even when ignoring measurement start-up/completion, therefore
 - it was probably dilated by instrumentation/measurement overhead

Performance analysis steps

- 0.0 Reference preparation for validation

- 1.0 Program instrumentation
 - 1.1 Summary measurement collection
 - 1.2 Summary analysis report examination

- 2.0 Summary experiment scoring
 - 2.1 Summary measurement collection with filtering
 - 2.2 Filtered summary analysis report examination

- 3.0 Event trace collection
 - 3.1 Event trace examination & analysis

BT-MZ summary analysis result scoring

```
% scorep-score scorep_bt-mz_sum/profile.cubex
```


Estimated aggregate size of event trace: 40 GB

Estimated requirements for largest trace buffer (max_buf): 11 GB

Estimated memory requirements (SCOREP_TOTAL_MEMORY): 11 GB

(warning: The memory requirements cannot be satisfied by Score-P to avoid intermediate flushes when tracing. Set SCOREP_TOTAL_MEMORY=4G to get the maximum supported memory or reduce requirements using USR regions filters.)

flt	type	max_buf[B]	visits	time[s]	time[%]	time/visit[us]	region
	ALL	10,751,698,480	1,639,454,685	1370.23	100.0	0.84	ALL
	USR	10,666,890,182	1,631,138,069	490.57	35.8	0.30	USR
	OMP	83,505,728	8,128,000	876.29	64.0	107.81	OMP
	COM	1,178,450	181,300	1.00	0.1	5.49	COM
	MPI	124,120	7,316	2.37	0.2	324.30	MPI

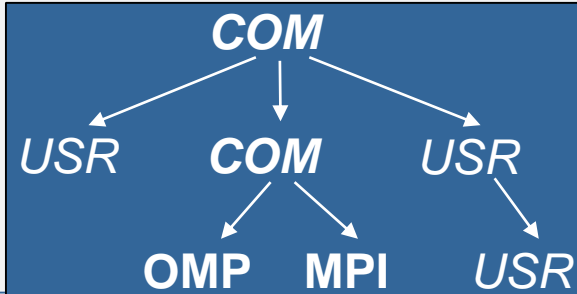

- Report scoring as textual output

40 GB total memory
11 GB per rank!


- Region/callpath classification
 - MPI** pure MPI functions
 - OMP** pure OpenMP regions
 - USR** user-level computation
 - COM** "combined" USR+OpenMP/MPI
 - ANY/ALL** aggregate of all region types

BT-MZ summary analysis report breakdown

```
% scorep-score -r scorep_bt-mz_sum/profile.cubex
[...]
```

flt	type	max_buf[B]	visits	time[s]	time[%]	time/visit[us]	region
	ALL	10,751,698,480	1,639,454,685	1370.23	100.0	0.84	ALL
	USR	10,666,890,182	1,631,138,069	490.57	35.8	0.30	USR
	OMP	83,505,728	8,128,000	876.29	64.0	107.81	OMP
	COM	1,178,450	181,300	1.00	0.1	5.49	COM
	MPI	124,120	7,316	2.37	0.2	324.30	MPI

USR	3,421,305,420	522,844,416	152.22	11.1	0.29	matmul_sub_
USR	3,421,305,420	522,844,416	109.03	8.0	0.21	matvec_sub_
USR	3,421,305,420	522,844,416	212.79	15.5	0.41	binvrhs_
USR	150,937,332	22,692,096	5.23	0.4	0.23	binvrhs_
USR	150,937,332	22,692,096	8.04	0.6	0.35	lhsinit_
USR	112,194,160	17,219,840	3.25	0.2	0.19	exact_solution_

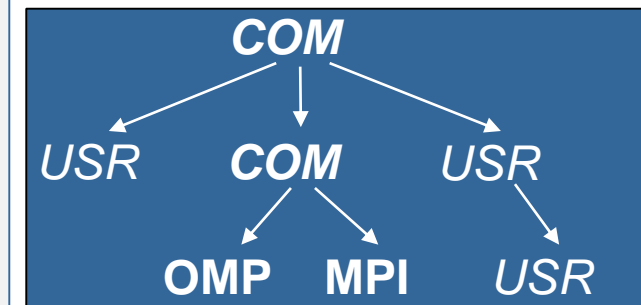

More than
9 GB just for these 6
regions

BT-MZ summary analysis score

- Summary measurement analysis score reveals
 - Total size of event trace would be ~40 GB
 - Maximum trace buffer size would be ~11 GB per rank
 - smaller buffer would require flushes to disk during measurement resulting in substantial perturbation
 - 99.75% of the trace requirements are for USR regions
 - purely computational routines never found on COM call-paths common to communication routines or OpenMP parallel regions
 - These USR regions contribute around 36% of total time
 - however, much of that is very likely to be measurement overhead for frequently-executed small routines
- Advisable to tune measurement configuration
 - Specify an adequate trace buffer size
 - Specify a filter file listing (USR) regions not to be measured

BT-MZ summary analysis report filtering

```
% cat ../config/scorep.filt
SCOREP_REGION_NAMES_BEGIN EXCLUDE
binvrhs*
matmul_sub*
matvec_sub*
exact_solution*
binvrhs*
lhs*init*
timer_*

% scorep-score -f ../config/scorep.filt [-c 2] \
  scorep_bt-mz_sum/profile.cubex

Estimated aggregate size of event trace:
Estimated requirements for largest trace buffer (max_buf):
Estimated memory requirements (SCOREP_TOTAL_MEMORY):
(hint: When tracing set SCOREP_TOTAL_MEMORY=21MB to avoid \
>intermediate flushes
or reduce requirements using USR regions filters.)
```

324 MB
81 MB
105 MB

- Report scoring with prospective filter listing 6 USR regions

324 MB of memory in total,
81 MB per rank!

Including 2 metric values:
792 MB
198 MB
222 MB

BT-MZ summary analysis report filtering

```
% scorep-score -r -f ../config/scorep.filt \
  scorep_bt-mz_sum/profile.cubex
flt type      max_buf[B]      visits time[s]  time[%]  time/
              visits[us]
-  ALL 10,751,698,480 1,639,454,685 1370.23  100.0    0.84  ALL
-  USR 10,666,890,182 1,631,138,069 490.57   35.8     0.30  USR
-  OMP 83,505,728 8,128,000 876.29   64.0     107.81  OMP
-  COM 1,178,450 181,300 1.00     0.1      5.49  COM
-  MPI 124,120 7,316 2.37     0.2      324.30  MPI

*  ALL 84,812,796 8,317,305 879.66   64.2     105.76  ALL-FLT
+  FLT 10,666,885,710 1,631,137,380 490.57   35.8     0.30  FLT
-  OMP 83,505,728 8,128,000 876.29   64.0     107.81  OMP-FLT
*  COM 1,178,450 181,300 1.00     0.1      5.49  COM-FLT
-  MPI 124,120 7,316 2.37     0.2      324.30  MPI-FLT
*  USR 4,498 689 0.00     0.0      3.75  USR-FLT

+  USR 3,421,305,420 522,844,416 152.22   11.1     0.29  matmul_sub_
+  USR 3,421,305,420 522,844,416 109.03   8.0      0.21  matvec_sub_
+  USR 3,421,305,420 522,844,416 212.79   15.5     0.41  binvrhs_
+  USR 150,937,332 22,692,096 5.23     0.4      0.23  binvrhs_
+  USR 150,937,332 22,692,096 8.04     0.6      0.35  lhsinit_
+  USR 112,194,160 17,219,840 3.25     0.2      0.19  exact_solution_
```

- Score report breakdown by region

Filtered routines marked with '+'

BT-MZ filtered summary measurement

```
% cd bin.scorep
% <editor> scorep.sbatch
[...]
export SCOREP_EXPERIMENT_DIRECTORY=scorep_bt-mz_sum_filter
export SCOREP_FILTERING_FILE=./config/scorep.filt
[...]


% sbatch scorep.sbatch
```

- Set new experiment directory and re-run measurement with new filter configuration
- Submit job

Score-P: Advanced Application Instrumentation



Advanced Application Instrumentation: Score-P Wrapper Scripts




- Hooking up the Score-P instrumenter `scorep` into complex build environments like *Autotools* or *CMake* was always challenging
- Score-P provides new convenience wrapper scripts to simplify this (since Score-P 2.0)
- *Autotools* and *CMake* need the used compiler already in the *configure step*, but instrumentation should not happen in this step, only in the *build step*

```
% SCOREP_WRAPPER=off \  
> cmake .. \  
> -DCMAKE_C_COMPILER=scorep-icc \  
> -DCMAKE_CXX_COMPILER=scorep-icpc
```

Disable instrumentation in the *configure step*

Specify the wrapper scripts as the compiler to use


- Allows to pass addition options to the Score-P instrumenter and the compiler via environment variables without modifying the *Makefiles*
- Run `scorep-wrapper --help` for a detailed description and the available wrapper scripts of the Score-P installation

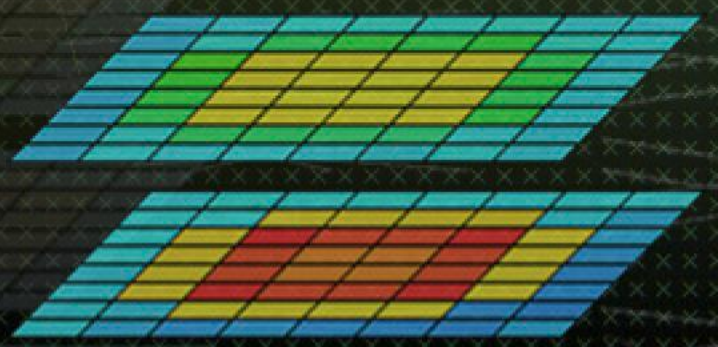

Score-P: Advanced Measurement Configuration



Advanced Measurement Configuration: Sampling



- Sampling as an additional source of events while measurement
- Novel combination of sampling events and instrumentation of MPI, OpenMP, ...
 - Sampling replaces compiler instrumentation (instrument with `--nocompiler` to further reduce overhead)
 - Instrumentation is used to get accurate times for parallel activities to still be able to identify patterns of inefficiencies
- Supports profile and trace generation

```
% export SCOREP_ENABLE_UNWINDING=true
% # use the default sampling frequency
% #export SCOREP_SAMPLING_EVENTS=perf_cycles@2000000

% OMP_NUM_THREADS=4 mpiexec -np 4 ./bt-mz_B.4
```

- Set new configuration variable to enable sampling

- Available since Score-P 2.0, only x86-64 supported currently

Advanced Measurement Configuration: Memory Recording



- Record calls to memory API functions and there resulting memory usage changes
 - C, C++, MPI, and SHMEM
 - Fortran only for GNU Compilers
- Supports profile and trace generation
 - Memory leaks are recorded in the profile additionally
 - Resulting traces are not supported by Scalasca yet

```
% export SCOREP_MEMORY_RECORDING=true
% export SCOREP_MPI_MEMORY_RECORDING=true

% OMP_NUM_THREADS=4 mpiexec -np 4 ./bt-mz_W.4
```

- Set new configuration variable to enable memory recording

- Available since Score-P 2.0

Advanced Measurement Configuration: Metrics



▪ Available PAPI metrics

- Preset events: common set of events deemed relevant and useful for application performance tuning
 - Abstraction from specific hardware performance counters,
 - mapping onto available events done by PAPI internally

```
% papi_avail
```

- Native events: set of all events that are available on the CPU
- (platform dependent)

```
% papi_native_avail
```

- Use the metric names in one of the `SCOREP_METRIC_PAPI` or `SCOREP_METRIC_PAPI_PER_PROCESS` measurement configuration variables separated by comma

Note: Due to hardware restrictions:

- Number of concurrently recorded events is limited
- There may be invalid combinations of concurrently recorded events

Advanced Measurement Configuration: Metrics



```
% man getrusage
struct rusage {
    struct timeval ru_utime; /* user CPU time used */
    struct timeval ru_stime; /* system CPU time used */
    long ru_maxrss; /* maximum resident set size */
    long ru_ixrss; /* integral shared memory size */
    long ru_idrss; /* integral unshared data size */
    long ru_isrss; /* integral unshared stack size */
    long ru_minflt; /* page reclaims (soft page faults) */
    long ru_majflt; /* page faults (hard page faults) */
    long ru_nswap; /* swaps */
    long ru_inblock; /* block input operations */
    long ru_oublock; /* block output operations */
    long ru_msgsnd; /* IPC messages sent */
    long ru_msrvcv; /* IPC messages received */
    long ru_nsignals; /* signals received */
    long ru_nvcsw; /* voluntary context switches */
    long ru_nivcsw; /* involuntary context switches */
};
```

- Available resource usage metrics
- Note:
 - 1) Not all fields are maintained on each platform.
 - 2) Check scope of metrics (per process vs. per thread)
- Use the member names in one of these measurement configuration variables separated by comma:
 - SCOREP_METRIC_RUSAGE
 - SCOREP_METRIC_RUSAGE_PER_PROCESS

Advanced Measurement Configuration: CUDA




- Record CUDA events with the CUPTI interface

```
% export SCOREP_CUDA_ENABLE=gpu, kernel, idle
```

- All possible recording types
 - runtime CUDA runtime API
 - driver CUDA driver API
 - gpu GPU activities
 - kernel CUDA kernels
 - idle GPU compute idle time
 - memcpy CUDA memory copies

Score-P User Instrumentation API



- Can be used to mark initialization, solver & other phases
 - Annotation macros ignored by default
 - Enabled with [--user] flag of instrumenter
 - Defines SCOREP_USER_ENABLE
- Appear as additional regions in analyses
 - Distinguishes performance of important phase from rest
- Can be of various type
 - E.g., function, loop, phase
 - See user manual for details
- Available for Fortran / C / C++

Score-P User Instrumentation API (Fortran)



```
#include "scorep/SCOREP_User.inc"


subroutine foo(...)
  ! Declarations
  SCOREP_USER_REGION_DEFINE( solve )

  ! Some code...
  SCOREP_USER_REGION_BEGIN( solve, "<solver>", \
                           SCOREP_USER_REGION_TYPE_LOOP )

  do i=1,100
    [...]
  end do
  SCOREP_USER_REGION_END( solve )
  ! Some more code...
end subroutine
```

- Requires processing by the C preprocessor
 - For most compilers, this can be automatically achieved by having an uppercase file extension, e.g., `main.F` or `main.F90`

Score-P User Instrumentation API (C/C++)




```
#include "scorep/SCOREP_User.h"

void foo()
{
    /* Declarations */
    SCOREP_USER_REGION_DEFINE( solve )

    /* Some code... */
    SCOREP_USER_REGION_BEGIN( solve, "<solver>",
                             SCOREP_USER_REGION_TYPE_LOOP )
    for (i = 0; i < 100; i++)
    {
        [...]
    }
    SCOREP_USER_REGION_END( solve )
    /* Some more code... */
}
```

Score-P User Instrumentation API (C++)



```
#include "scorep/SCOREP_User.h"

void foo()
{
    // Declarations

    // Some code...
    {
        SCOREP_USER_REGION( "<solver>",
                           SCOREP_USER_REGION_TYPE_LOOP )
        for (i = 0; i < 100; i++)
        {
            [...]
        }
    }
    // Some more code...
}
```

Score-P Measurement Control API



- Can be used to temporarily disable measurement for certain intervals
 - Annotation macros ignored by default
 - Enabled with [--user] flag

```
#include "scorep/SCOREP_User.inc"


subroutine foo(...)
  ! Some code...
  SCOREP_RECORDING_OFF()
  ! Loop will not be measured
  do i=1,100
    [...]
  end do
  SCOREP_RECORDING_ON()
  ! Some more code...
end subroutine
```

Fortran (requires C preprocessor)

```
#include "scorep/SCOREP_User.h"

void foo(...) {
  /* Some code... */
  SCOREP_RECORDING_OFF()
  /* Loop will not be measured */
  for (i = 0; i < 100; i++) {
    [...]
  }
  SCOREP_RECORDING_ON()
  /* Some more code... */
}
```

C / C++

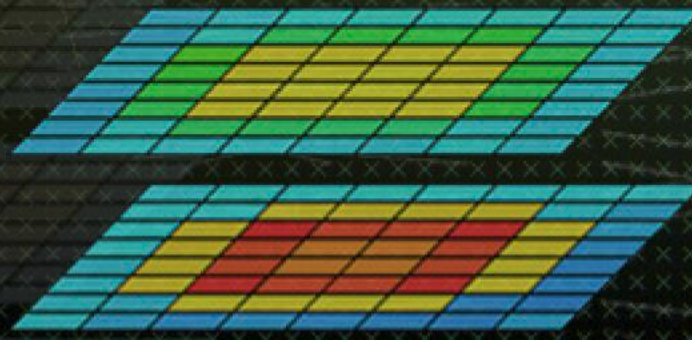

Score-P: Conclusion and Outlook



Project management

- Ensure a single official release version at all times which will always work with the tools
- Allow experimental versions for new features or research
- Commitment to joint long-term cooperation
 - Development based on meritocratic governance model
 - Open for contributions and new partners

Future features

- Scalability to maximum available CPU core count
- Support for emerging architectures and new programming models
- Features currently worked on:
 - User provided wrappers to 3rd party libraries
 - Hardware and MPI topologies
 - Basic support of measurement without re-compiling/-linking
 - I/O recording
 - Java recording
 - Persistent memory recording (e.g., PMEM, NVRAM, ...)

Further Information

- Community instrumentation & measurement infrastructure
 - Instrumentation (various methods) and sampling
 - Basic and advanced profile generation
 - Event trace recording
 - Online access to profiling data
- Available under New BSD open-source license
- Documentation & Sources: <http://www.score-p.org>
- User guide also part of installation: <prefix>/share/doc/scorep/{pdf,html}/
- Support and feedback: support@score-p.org
- Subscribe to news@score-p.org, to be up to date